

OPTIONAL



IT_ Sistema saldatura del film estensibile autoregolante per qualsiasi dimensione del pallet.
EN_ Film weld unit self adjusting for any size of pallet.
FR_ Système de soudure du film étirable à réglage automatique pour toutes dimensions de la palette.
DE_ Selbsteinstellendes Folienende Verschweißsystem passt sich auf sämtliche Palettengrößen automatisch an.
ES_ Sistema soldadura del film extensible autorregulable para cualquier dimensión de palet.



IT_ Pressore tenuta pallet.
EN_ Pallet holder presser.
FR_ Plateau stabilisateur de charge.
DE_ Palettendruckhalter.
ES_ Prensa retención palet.



IT_ Sistema di pesatura integrato.
EN_ Integrated weighing systems.
FR_ Pesage intégré.
DE_ Integrierte Waagesysteme.
ES_ Sistema integrado de pesaje.




IT_ Sistema a corda: Permette di ridurre l'altezza del film formando un cordone che assicura una più efficiente stabilizzazione del carico.
EN_ Roping System: Reducing the film width to form a rope to ensure more effective load stabilisation.
FR_ Systeme permettant de réduire la laie du film en formant un cordon qui assure une meilleure stabilisation de la charge.
DE_ Schnurrvorrichtung: Reduzierung der Folienbreite zur Schnur um eine bessere Stabilisierung der Ladung zu gewährleisten.
ES_ Sistema de Cordón. Permite reducir la altura del film formando un cordón que asegura con mas eficacia la estabilidad de la carga.



IT_ Colonna per carichi fino a 3700 mm.
EN_ Mast for loads up to 3700 mm high.
FR_ Colonne pour charges jusqu'à 3700 mm.
DE_ Mast für Ladungen bis 3700 mm hoch.
ES_ Columna para cargas de hasta 3700 mm.



IT_ Sistema di prestiro elettronico con inserimento rapido del film estensibile.
EN_ Electronically controlled pre-stretch carriage with rapid film loading system.
FR_ Pré-étirage motorisé et asservi à chargement rapide du film étirable.
DE_ Elektronisch gesteuerte Vordehnung mit Folienschnellwechselsystem).
ES_ Sistema de pre-estiro electrónico con inserción rápida del film extensible.

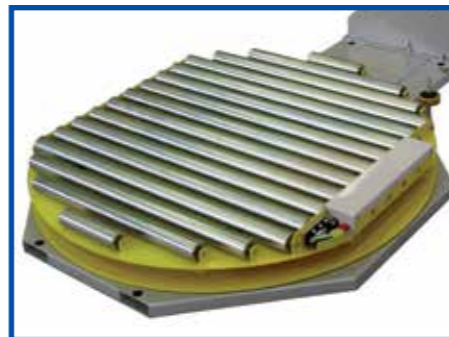

IT_ Rulliera non motorizzata.
EN_ Non-motorized roller conveyor.
FR_ Non-motorisés à rouleaux.
DE_ Nicht-Motorisierte Rollenbahn.
ES_ Rodillos no motorizados.



IT_ Controllo peso film.
EN_ Film weight check.
FR_ Calcul poids de film.
DE_ Kontrolle Foliengewicht.
ES_ Control peso film.

AUTOMATIC

MYTHO STATION

MAINTENANCE FREE MACHINES
EASY TO BE INSTALLED

- Atlanta Stretch S.p.A - Italy
- Atlanta Deutschland GmbH
- Atlanta Iberica - Spain
- Atlanta Packaging Ltd - UK
- Atlanta France Sarl
- Atlanta Stretch Australia
- Atlanta Stretch Russia



1300003828 - LR1019 - Le indicazioni riportate non sono impegnative. The information given is not binding. Les indications fournies ne sont pas contraignantes. Die Angaben sind unverbindlich. Las indicaciones presentadas no nos comprometen.

Atlanta Stretch S.p.A
 Via Torriana, 58
 47824 Poggio Torriana (RN) Italy
 Tel. +39 0541 627145
 Fax +39 0541 627220
 www.atlantastretch.com
 sales@atlantastretch.com



www.atlantastretch.com



MYTHO STATION

TECHNICAL CHARACTERISTICS

Total installed power	2.50 Kw
Standard input voltage	400V three-phase - 50 Hz - 6A
Electrical system and motors protection	IP 54
Standard pallet height	2500 mm
Max capacity	1500 Kg
Table diameter	1800 mm
Maximum table rotation speed	12 rpm

Easy to use

IT. 99 cicli di avvolgimento preimpostati e possibilità di programmare un numero illimitato di opzioni.
EN. 99 pre-set wrapping cycles and the possibility of programming an unlimited number of options.
FR. 99 programmes mémorisables comprenant un nombre important de cycles et fonctions pour résoudre les cas les plus difficiles.
DE. 99 Vorprogrammierte Wickelprogramme mit unbegrenzten einstellbaren Parameter von Bedienungsstafel.
ES. 99 ciclos de envoltura predispuesta y posibilidad de programar un número ilimitado de opciones.

Display touch-screen Multifunction programmable control panel.



IT. Sistema di prestiro elettronico con inserimento rapido del film estensibile
EN. Electronically controlled pre-stretch carriage with rapid film loading system.
FR. Pré-étirage motorisé et asservi à chargement rapide du film étirable.
DE. Elektronisch gesteuerte Vordehnung mit Folienschnellwechselsystem).
ES. Sistema de pre-estiro electrónico con inserción rápida del film extensible.



IT. Avvolgitore automatico stand alone con sistema di taglio e aggancio, semplice e affidabile.
EN. Automatic stand alone wrapping turntable with clamp and cutting system, simple and reliable.
FR. Banderoleuse automatique a table tournante hors ligne avec groupe pince et coupe, simple et fiable.
DE. Automatische Stretchwickler mit Klemm- und Schneidesystem, einfach und zuverlässig.
ES. Envolvedora de mesa giratoria automática fuera de línea con grupo pinza y corte film, simple y confiable.



MYTHO STATION MAST

MYTHO STATION MAST

TECHNICAL CHARACTERISTICS

Total installed power	2.50 Kw
Standard input voltage	400V three-phase - 50 Hz - 6A
Electrical system and motors protection	IP 54
Standard pallet height	2500 mm
Max capacity	1500 Kg
Table diameter	1800 mm
Maximum table rotation speed	12 rpm



IT. Rampa di carico.
EN. Loading ramp.
FR. Rampe.
DE. Ladungsrampe.
ES. Rampa de carga.

MYTHO AUTO


TECHNICAL CHARACTERISTICS

Total installed power	2.50 Kw
Standard input voltage	400V three-phase - 50 Hz - 6A
Electrical system and motors protection	IP 54
Standard pallet height	2500 mm
Max capacity	2000 Kg
Table diameter	1800 mm
Maximum table rotation speed	12 rpm

PALLETS




FE

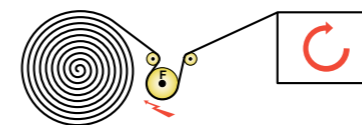


IT. Frizione elettromagnetica regolabile da pannello comandi.
EN. Electromagnetic friction adjustable from control panel.
FR. Frein électromagnétique réglable depuis le panneau de commande.
DE. Elektromagnetische Bremse auf Umlenkwalze vom Bedienpult einstellbar.
ES. Fricción electromagnética regulable desde el panel de comandos.

PRS POWER ROLLER STRETCH

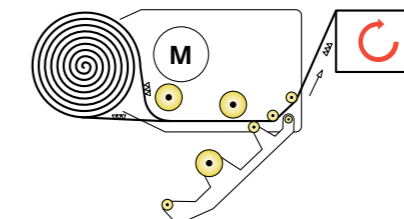

IT. Sistema di prestiro motorizzato a 3 rulli comandato elettronicamente con rapporti intercambiabili: 150 - 200 - 250%.
EN. Motorized pre-stretch system with 3 driven rollers electronically controlled with interchangeable ratios: 150 - 200 - 250%.
FR. Système de pré-étirage motorisé et asservi à 3 rouleaux, rapports interchangeables: 150 - 200 - 250%.
DE. Angetriebener Vordehnssystem mit 3 Vordehnrollen, elektronisch gesteuert mit leicht wechselbarer Zahnradsätzen: 150 - 200 - 250%.
ES. Sistema de prestiro motorizado con 3 rodillos, comandado electrónicamente con desarrollos intercambiables: 150 - 200 - 250%.

PS POWER STRETCH

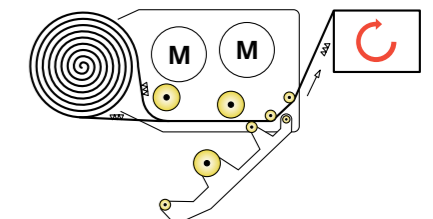

IT. Sistema di prestiro motorizzato a 3 rulli con 2 motori e variazione continua da 120 a 350% regolabile da quadro comandi.
EN. Motorized pre-stretch system with 3 driven rollers and 2 motors adjustable between 120 to 350% from control panel.
FR. Système de pré-étirage motorisé et asservi à 3 rouleaux et 2 moteurs, rapport ajustable de 120 à 350% depuis le panneau de commande.
DE. Angetriebener Vordehnssystem mit 3 Vordehnrollen und 2 Motoren, stufenlos regelbare Werte zwischen 120 und 350% von Bedienpult.
ES. Sistema de prestiro motorizado con 3 rodillos y 2 motores, regulable da 120 a 350% desde el panel de comandos.